



For Sure

PFW 1000 Series  
expansion: PFW 1020



## PFW 1000 Series expansions



The PFW 1000 series will be expanded with a new wall mount: the PFW 1020. A wall mount with one pivot point, designed with small displays in mind.


## PFW 1020: Key features




- Designed for 10" to 28" screens up to 16 kg
- VESA 50x50, 75x75, 100x100
- Post-installation levelling
- Theft delaying padlock
- 10 degrees of smooth tilt, with accessible tilt lock screw
- TÜV certified

# PFW 1020: Key features

Tilt lock screw

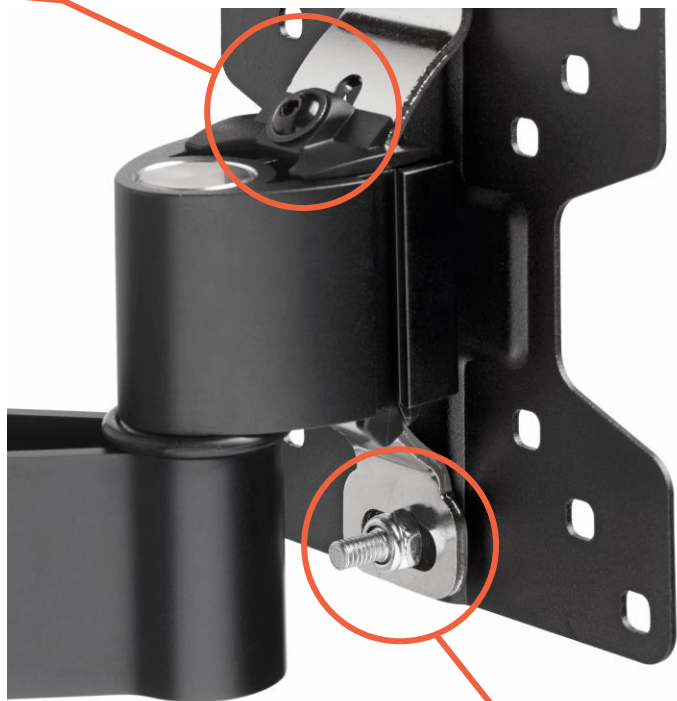

Horizontal levelling

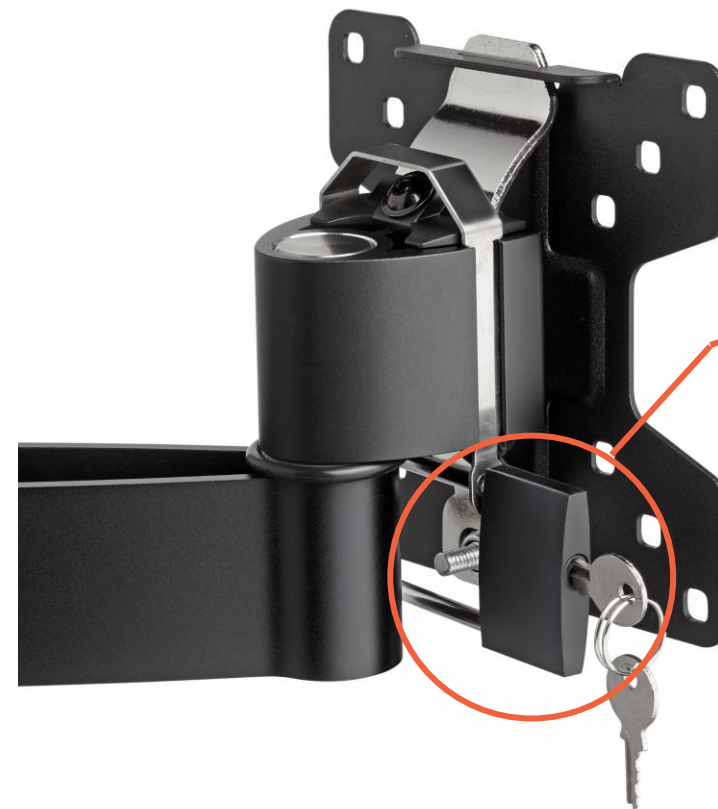

Padlock

# PFW 1000 Series line-up



**PFW 1020**



**PFW 1030**



**PFW 1040**

# PFW 1020: Datasheet + Manual

**Installation Manual for PFW 1020**

**Models:** PFW 1020, PFW 1030, PFW 1040

**Capacity:** PFW 1020-1030-1040 max. 16 kg / 35 lbs

**Parts List:**

- 1x Fischer (plus 10)
- 1x Spacer 18x19 4x16
- 4x Bolt M4x6
- 4x Bolt M4x12
- 4x Bolt M4x16
- 4x Bolt M4x20
- 1x Washer M4x16
- 1x Washer M4x20
- 1x Lock - 1st try
- 2x Abrak key

**Installation Steps:**

1. Mounting instructions (PFW 1020, PFW 1030, PFW 1040)
- 2a, 2b. Initial assembly of the bracket.
3. Mounting to the wall.
- 4a, 4b. Tightening and adjustment.
5. Final assembly and locking.
- 5a. Detail of the locking mechanism.
6. Tilt friction adjustment.
- 7, 8. Final adjustments.
9. Final check and operation.

**Warnings:** TILT FRICTION

**Product data sheet PFW 1020**

Dimensions in mm [inch]

Screen sizes: 10"-26"  
Max weight: 16 kg

**Wall mounting kit:**  
Fischer plug SX 6x40 (3x)  
Hexagon head screw 6 x 60 (3x)  
Washer 6 x 18 x 1.6 (3x)

**Screen mounting kit:**  
Safety bolt M4 x 12 (4x)  
Safety bolt M4 x 20 (4x)  
Safety bolt M8 x 16 (4x)  
Safety bolt M8 x 30 (4x)

**Dimensions:**

- 62 [2.4]
- 100 [3.9]
- 75 [3.0]
- 50 [2.0]
- 50 [2.0]
- 75 [3.0]
- 100 [3.9]
- 57 [2.2]
- 14 [0.6]
- 137 [5.2]
- 189 [7.4]
- 210 [8.3]
- 227 [8.9]
- 77 [3.0]
- 10°/+10°

**Notes:**

1. The screen must be mounted on a wall with a minimum thickness of 100 mm. The mounting surface must be flat and free of any protrusions or indentations.

2. The screen must be mounted on a wall with a minimum strength of 16 kg. The mounting surface must be able to support the weight of the screen and the mounting kit.

3. The screen must be mounted on a wall with a minimum height of 100 mm. The mounting surface must be able to support the weight of the screen and the mounting kit.

4. The screen must be mounted on a wall with a minimum width of 100 mm. The mounting surface must be able to support the weight of the screen and the mounting kit.

5. The screen must be mounted on a wall with a minimum depth of 100 mm. The mounting surface must be able to support the weight of the screen and the mounting kit.

6. The screen must be mounted on a wall with a minimum thickness of 100 mm. The mounting surface must be able to support the weight of the screen and the mounting kit.

7. The screen must be mounted on a wall with a minimum strength of 16 kg. The mounting surface must be able to support the weight of the screen and the mounting kit.

8. The screen must be mounted on a wall with a minimum height of 100 mm. The mounting surface must be able to support the weight of the screen and the mounting kit.

9. The screen must be mounted on a wall with a minimum width of 100 mm. The mounting surface must be able to support the weight of the screen and the mounting kit.

10. The screen must be mounted on a wall with a minimum depth of 100 mm. The mounting surface must be able to support the weight of the screen and the mounting kit.

## PFW 1020: Logistical information

Model nr.	Description	Item Nr	Color	On pallet (pcs)	Carton Dimensions wxlxh (mm)	Weight box (kg)	Weight box (lbs)	EAN-13
PFW 1020	PFW 1030 Display wall mount turn & tilt	7310200	Black	216	280,5x255x86	1,3	2.87	8712285370281



